VIEW ON MATING SIDE

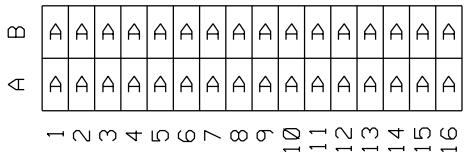

A = 32 CONTACTS L=4,5

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85040-0002 sht.1
Technical Data	PS-85042-0001

A	G2/0	a1-16 b1-16
Contact symbol	Perform. level	Contact position number

ECN 2264 Produktspec. 96-10-18 KN	REVISIONS	FOR PREVIOUS REVISIONS SEE MRI LIST	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°
A1	LTR		INCH / METRIC: 3 PLACE ± . / ± ; 2 PLACE ± . / ± ; 1 PLACE ± . / ±
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS
			DESIGN DIMENSION ☐ MM ☐ IN.
			EQUIVALENT DIMENSION ☐ MM ☐ IN.
			IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY Ca	SIGN
CHK'D BY KN	SIGN
APP'D BY	SIGN
SCALE	

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8504000 s01

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE 32 pos. female connector acc. DIN 41612 style B/2 contacts arrangement

molex® MOLEX EUROPE

SHEET NO. 1 OF 1 | DATE 96/05/15

PART NO. 85040-0000 | DWG NO. SDA-85040-0000 | SIZE A