

Plug for PCBs; straight; 4-pole; Cod. B; gray

www.wago.com/770-854/062-000



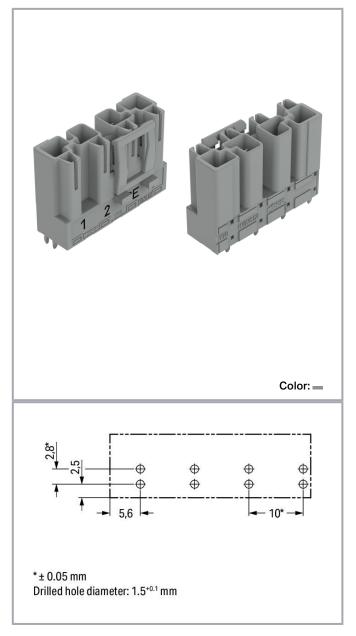

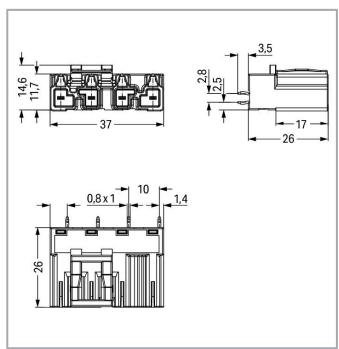

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

www.wago.com/770-854/062-000



Item description

Male connector/plug WINSTA® MIDI B coding

Reliably secure electrical installations with exceptional connection technology: The WINSTA® MIDI male connector/plug. Our enormous number of pluggable PCB connectors with different insertion directions and operating variants offers you the right solution for your application at all times. The coding options reduce installation errors, allowing fast, secure wiring of all components. B coding enables the WINSTA® MIDI pcb connectors to be used for control in applications in automation, robotics, and mechanical engineering. The rated current and voltage are important criteria for selecting a pcb connector: They tell us about the product's domains of use. This product has a current rating of 25 A – so it is also suitable for powerful loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy, secure, tailored electrical installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It allows error-free installation of cables and components, quickly and reliably. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with *WINSTA®* MIDI pcb connectors with protection against mismating from WAGO.

- pcb connector with protection against mismating
- pre-assembled versions
- with B coding for use in process automation, such as lighting technology, among other examples
- convenient installation and commissioning

Data Notes

Variants:

Other pole markings
Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/.

Electrical data

Ratings per IEC/EN

Ratings per IEC/EN 60664-1
Nominal voltage (III/3) 400 V

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-854/062-000



Rated impulse voltage (III/3)	6 kV
Rated current	25 A
Note (rated current)	25 A for 3-pole load
	20 A for 4-pole load
Legend (ratings)	(III / 3)
Ratings per UL 1977	
Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with
	currents below 16 A and voltages up to 600 V. For further
	information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A
General	
Note on contact resistance	approx. 1 m Ω of contact resistance
	approx. 0.25 m Ω contact transition plug/socket
Connection data	
Total number of potentials	4
Number of levels	1
Connection 1	
Pole number	4
Physical data	
Pin spacing	10 mm / 0.394 inches
Width	37 mm / 1.457 inches
Height	29.5 mm / 1.161 inches
Height from the surface	26 mm / 1.024 inches
Depth	14.6 mm / 0.575 inches
Solder pin length	3.5 mm
Solder pin dimensions	1 x 0.8 mm

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Drilled hole diameter with tolerance

Do you have any questions about our products?

1.5 ^(-0.1 ... ±0.1) mm

www.wago.com/770-854/062-000



Mechanical Data

Application	Control technology
Coding	В
Variable coding	Yes
Marking	1 2 PE 3
Potential marking	1 2 PE 3
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Design	straight

Plug-in connection

Male connector/plug
for PCB
Yes
All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
90 °
yes
locking lever
All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

PCB contact

PCB contact	THT
Solder pin arrangement	2 in-line solder pins/pole
Number of solder pins per potential	2

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?



Material Data

Note (material	data)	

Information or	n material s	specifications	can be	found here
II II OI II I I I I I I I I I I I I I I	i illiatoriai c	podinoations	Carroc	TOUTIUTION

Color	gray
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.206 MJ
Weight	8.8 g

Environmental requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 ℃
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

eCl@ss 9.0 27-44-06-05 ETIM 8.0 EC002560 ETIM 7.0 EC002560 PU (SPU) 50 pcs Packaging type box Country of origin PL GTIN 4050821555537	eCl@ss 10.0	27-44-06-05
ETIM 7.0 EC002560 PU (SPU) 50 pcs Packaging type box Country of origin PL	eCl@ss 9.0	27-44-06-05
PU (SPU) 50 pcs Packaging type box Country of origin PL	ETIM 8.0	EC002560
Packaging type box Country of origin PL	ETIM 7.0	EC002560
Country of origin PL	PU (SPU)	50 pcs
	Packaging type	box
GTIN 4050821555537	Country of origin	PL
	GTIN	4050821555537
Customs tariff number 85366990990	Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption	

Approvals / Certificates

General approvals

Logo Approval Additional Approval Text Certificate name

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?





cURusUnderwriters Laboratories Inc.

UL 1977 E45171

Counterpart



Item no.770-244/062-000 Socket; 4-pole; Cod. B; 4,00 mm²; gray

www.wago.com/770-244/062-000

Required accessories

Cover

Cover



Item no.: 770-360 Lockout cap; for plugs; 5-pole; separable; yellow

www.wago.com/770-360

Optional accessories

Coding

Coding



Item no.: 770-401

Coding pin; for plugs; Plastic; gray

www.wago.com/770-401

Downloads CAD/CAE-Data

CAD data

2D/3D Models 770-854/062-000

URL

Download

PCB Design

Symbol and Footprint 770-854/062-000

URL

Download

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-854/062-000



- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

CAE data

ZUKEN Portal 770-854/062-000 URL Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-854/062-000 URL
Plug for PCBs; straight; 4-pole; Cod. B; gray

Installation Notes

Product family

WINSTA® MIDI

Show all products from the family

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

05.06.2023 Page 7/7

Download